

BEST AVAILABLE COPY



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01R 33/44	A1	(11) International Publication Number: WO 99/19740 (43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/GB98/03099 (22) International Filing Date: 15 October 1998 (15.10.98) (30) Priority Data: 9721892.9 15 October 1997 (15.10.97) GB (71) Applicant (for all designated States except US): BTG INTERNATIONAL LIMITED [GB/GB]; 10 Fleet Place, Limeburner Lane, London EC4M 7SB (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): PEIRSON, Neil, Francis [GB/GB]; 86 Harlestone Road, Northampton NN5 7AG (GB). BARRAS, James [GB/GB]; Dept. of Chemistry, King's College London, The Strand, London WC2R 2LS (GB). SMITH, John, Alec, Sydney [GB/GB]; 28 Leeward Gardens, London SW19 7QR (GB). (74) Agents: COZENS, Paul, Dennis et al.; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).	(81) Designated States: CA, CN, IL, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: METHODS OF AND APPARATUS FOR NQR TESTING A SAMPLE <div style="text-align: center;"> </div>		
(57) Abstract <p>Methods of and apparatus for Nuclear Quadrupole Resonance (NQR) testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1, are disclosed. The off-resonance and the sensitivity of the NQR test may be further improved by applying excitation (in the form of "bridging pulses") between the two excitation blocks. The method comprises applying two excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks, detecting resonance response signals, and comparing the response signals from respective blocks. The delay time is less than the T_1 value of the nuclei.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 99/19740

PCT/GB98/03099

- 1 -

METHODS OF AND APPARATUS FOR NQR TESTING A SAMPLE

The present invention relates to methods of and apparatus for Nuclear Quadrupole Resonance (NQR) testing a sample. The invention has particular application to the
5 detection of the presence of a given substance in a sample. The sample may contain or be suspected of containing nuclei of integral or half-integral spin quantum number ($I \geq \frac{1}{2}$). The invention is particularly suited to the testing of substances displaying weak NQR signals, and/or having low NQR frequencies, or more especially having long values of spin-lattice relaxation time (T_1), in circumstances where interfering
10 signals (as later discussed) may be encountered.

Substances which have relatively low NQR frequencies (perhaps 1 or 2MHz or less) and relatively long values of T_1 (perhaps 500 ms, 5 or 10 s or more) include the explosives PETN and TNT, Potassium Nitrate (KNO_3) and ^{27}Al in alumina. For
15 example, PETN has resonance frequencies around 0.9 MHz, a T_1 of roughly 30s at room temperature, as well as a spin-spin relaxation time (T_2) of approximately 20ms. It is noted in passing that T_2 is preferably defined herein as the exponential constant measured by means of a Hahn echo or similar pulse sequence.

20 NQR testing is used for detecting the presence or disposition of specific substances, and in particular polycrystalline substances. It depends on the energy levels of quadrupolar nuclei, which have a spin quantum number I greater than $\frac{1}{2}$, of which ^{14}N is an example ($I = 1$). ^{14}N nuclei are present in a wide range of substances, including animal tissue, bone, food stuffs, explosives and drugs. One particular use of the
25 technique described herein is in the detection of the presence of substances such as explosives or narcotics. The detection may be of baggage at airports, or of explosives or drugs concealed on the person or buried underground or elsewhere. Other nuclei of interest are ^{27}Al ($I=5/2$) and ^{63}Cu ($I=3/2$). ^{27}Al is present in minerals, cement and concrete, whilst ^{63}Cu is present in ores and many high T_c superconducting materials.

30

In conventional Nuclear Quadrupole Resonance testing a sample is placed within or near to a radio-frequency (rf) coil and is irradiated with pulses or sequences of pulses of electro-magnetic radiation having a frequency which is at or very close to a

WO 99/19740

PCT/GB98/03099

- 2 -

resonance frequency of the quadrupolar nuclei in a substance which is to be detected. If the substance is present, the irradiant energy will generate a precessing magnetization which can induce voltage signals in a coil surrounding the sample at the resonance frequency or frequencies and which can hence be detected as a free induction decay (f.i.d.) during a decay period after each pulse or as an echo after two or more pulses. These signals decay at a rate which depends on the time constants T_2^* for the f.i.d., T_2 and T_{2e} for the echo amplitude as a function of pulse separation, and T_1 for the recovery of the original signal after the conclusion of the pulse or pulse sequence.

10 As described in International Patent Application No. WO 96/26453 in the name of British Technology Group Limited, the subject matter of which is incorporated herein by reference, spurious interfering signals (also termed "ringing") which are not associated directly with or due to the nuclear resonance may sometimes arise from a sample during NQR tests.

15

For example, one group of materials which can cause interference problems includes metallic conductors. Such materials may be commonly found in many types of objects in baggage. It has been discovered that the interference may be particularly pronounced when a sample includes metallic or ferromagnetic material as a layer of plating on another material, especially, it has been found, when the plating layer comprises Nickel. Objects which are particularly prone to such problems include screws or key-rings. The cause of this type of interference has not been proven, but it is believed to emanate from ferromagnetic or like resonance effects in the B_1 field of the sample coil, and be due to a form of magneto-acoustic ringing. It should be emphasised that this interference is not an artefact of the particular detection apparatus used, but a feature of the material itself. Also it will be understood that, in the context of the detection of the presence of a particular substance in a sample, it would usually not be the particular nuclear species to be detected but the remainder of the sample which would give rise to the interfering signals.

30

The spurious interfering signals (or "artefacts") commonly have decay characteristics very similar to those of true NQR signals, and, furthermore, are often many times stronger; they can last for several milliseconds. The phase of those interfering signals

WO 99/19740

PCT/GB98/03099

- 3 -

and that of the resonance response signal following a single radio-frequency excitation pulse are entirely determined by the rf phase within the pulse. There is, however, one important distinction. When two or more pulses are used, the phase of the NQR response signal, whether it be a free induction decay (f.i.d.) or an echo, depends on the relative phases of the two preceding pulses, unlike that of the interfering signal, which is determined almost entirely by that of the immediately preceding pulse.

This distinction has been exploited in WO 96/26453 in an attempt to remove the interfering signal from an NQR response signal. The proposed solution involves the use of at least one pair of excitation pulse sequences (or blocks) in which the phase of the pulses is controlled in such a way that when the response signals from the two member sequences of the pair are compared the spurious signals can be largely eliminated whilst the genuine NQR signals can be retained.

It has been discovered pursuant to the present invention that, when applying a multiple pulse sequence such as one of those described in WO 96/26453, the response off-resonance varies with frequency in a periodic fashion. An example of a typical off-resonance response to a multiple pulse sequence for a typical substance is shown in Figure 1. The response has been found to have narrow peaks and wide troughs which are believed to be due to the pulsed nature of the excitation; the separation of the peaks is believed to be related to the pulse repetition rate. Furthermore, the resonance frequency of the peaks varies with temperature and other such environmental parameters. Unless the excitation is exactly at the resonance frequency, or exactly at the frequency of one of the other peaks, there will not reliably be any response signal. Therefore, for example, in a typical situation (such as airport security checking) where the exact temperature of the sample is not known, the usefulness of such multiple pulse sequences may be reduced.

Further, it has been found pursuant to the present invention that the off-resonance behaviour of multiple pulse sequences can cause particular problems when they are used in pairs as described above to reduce spurious signals, particularly if the substance under test has a relatively low resonance frequency and/or long spin-lattice relaxation time.

WO 99/19740

PCT/GB98/03099

- 4 -

The present invention seeks to maintain or improve upon the level of spurious signal suppression achieved using the technique described in WO 96/26453, but to improve the off-resonance response, especially for long T_1 substances. The invention also seeks to improve the sensitivity of NQR tests. The invention is based in part upon the
5 discovery, pursuant to the invention, that an improvement in the off-resonance response and the sensitivity of the NQR test may result if the delay time between the two excitation pulse blocks mentioned above is carefully controlled.

Prior to the present invention, it was considered that sufficient time must be left
10 between the two excitation blocks to allow the NQR magnetization generated during the first block to recover. However, it has now been discovered pursuant to the present invention that, by having a delay between the two blocks which is insufficient for the magnetization to recover, the off-resonant response behaviour and the sensitivity of the NQR test may be considerably improved.

15

According to the present invention there is provided a method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the method comprising:

20 applying two (or possibly more) excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks;
detecting resonance response signals; and
comparing the response signals from respective blocks;
wherein the delay time is less than the T_1 value of the nuclei.

25 By having a delay between the two blocks which is less than the T_1 value of the nuclei (that is, a delay which gives insufficient time for the magnetization to recover), the off-resonant response behaviour and the sensitivity of the NQR test may be considerably improved. This may allow improved detection of substances displaying weak NQR signals, in situations where the exact temperature of the sample is not known.

30

Each excitation block (or sub-block) may comprise one or more excitation pulses which generates an NQR response. Preferably, each excitation block comprises at least two, three, five or ten pulses, although it may comprise a multiplicity of pulses, say more

WO 99/19740

PCT/GB98/03099

- 5 -

- than one hundred or even more than one thousand pulses. Suitably, the separation between each pulse may be less than, preferably less than one tenth of, the ring-down time (decay time) of the spurious interfering signals. Preferably, the separation between the pulses in a block is the same. Preferably the separation between the pulses
- 5 is as defined in WO 96/26453 in relation to the SSFP and PSL pulse sequences. For example, the separation may be less than ten times, or five times, or three times or twice the value of the free induction decay time T_2^* . Indeed, the separation may be less than T_2^* or a half T_2^* .
- 10 Preferably (in any embodiment whatsoever), where there are a plurality of pulses in each block (or sub-block), there is no phase alternation between those pulses. As used herein, the term "phase alternation" connotes a variation of phase of more than 90° , preferably more than 135° , and more preferably of roughly 180° . Accordingly, "no phase alternation" implies a variation of phase certainly less than 180° , preferably less
- 15 than or equal to 135° , and more preferably less than or equal to 90° .

- Preferably, the comparison takes the form of a combination of the responses from the respective blocks such that the NQR signal is enhanced while any spurious signals are reduced. In one embodiment, the comparison takes the form of a subtraction of the
- 20 responses from the respective blocks, possibly with some weighting being given to one of the blocks to account for differences in the signal levels generated by the blocks. In other embodiments involving blocks having two or more constituent sub-blocks, the responses from the sub-blocks of one block are combined with the responses from either corresponding, or indeed non-corresponding, sub-blocks of the other block, such
- 25 that the overall NQR signal is enhanced.

- Advantageously, the delay time is less than half, preferably less than a quarter, more preferably less than a tenth and even more preferably less than a hundredth of the T_1 value. In short, it is preferable that the delay time is very much less than the spin-
- 30 lattice relaxation time of the nuclei.

It is also preferred that the delay time is greater than the spin-spin relaxation time, T_2 , of the nuclei, and hence advantageously the delay time is greater than once, preferably

WO 99/19740

PCT/GB98/03099

- 6 -

greater than twice, more preferably greater three times and even more preferably greater than five times the T_2 value. This can ensure effective relaxation of the magnetization in the x-y plane.

- 5 On the other hand, preferably, the delay time is less than ten times and more preferably less than five times the T_2 value, since this can maintain the duration of the test within a reasonable limit.

- For typical nuclei of interest, preferred ranges of the delay time are between 1 and
10 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

- One important feature of the present invention alluded to above is the discovery pursuant to the invention of the nature of the off-resonance performance in NQR of
15 multiple pulse sequences. In order to improve the performance, preferably the first and second blocks, and the delay time therebetween, are arranged such that, if the resonance frequency of the nuclei were varied over a given range, the first and second blocks would generate response signals whose variation with frequency over the given range would in combination be less than for the response signals from separately either
20 the first or second block. By arranging the first and second blocks and the delay time therebetween thus, the periodic variation of the response signals with frequency can be to an extent mitigated. It is in particular preferred if the peaks in the frequency response characteristic of one excitation block are arranged to coincide generally with the troughs in the characteristic of the other block, and *vice versa*.

25

- It has been discovered pursuant to the present invention that the off-resonance response and the sensitivity of the NQR test may be further improved by applying excitation between the two excitation blocks. Therefore the method may further comprise applying excitation between the two excitation blocks. Preferably, the excitation is in
30 the form of one or more excitation pulses, such pulses being termed herein "bridging pulses". By the use of such excitation the behaviour of the second block can be adjusted so that the overall pulse sequence can produce the desired improved result. In particular, the excitation between the two blocks can be used to improve the

WO 99/19740

PCT/GB98/03099

- 7 -

combined off-resonance behaviour of the two blocks.

In one preferred embodiment, an excitation pulse (herein termed "refocussing pulse") is applied at a time substantially coincident with the last echo generated by the first
5 block.

In another preferred embodiment an excitation pulse (herein termed "windmill pulse") is applied at a time adjacent the centre of the delay time between the two blocks.

10 In another preferred embodiment, excitation pulses are applied between the excitation blocks to provide saturation. Such pulses may be termed "saturation pulses".

Various preferred features of the excitation applied between the two blocks are as follows.

15

If one (or more) excitation pulse is applied between the two blocks, the (or each) pulse may have an effective flip angle of between 20° and 160° , or 200° and 340° , or 30° and 60° , or 70° and 110° , or 160° and 200° . It is noted in passing that the term "effective" in relation to a 90° flip angle is used to connote the NQR equivalent of a
20 Nuclear Magnetic Resonance (NMR) 90° flip angle; in fact all flip angles referred to herein are "effective" flip angles.

If a plurality of excitation pulses is applied between the blocks, the second such pulse may be of the same or different flip angle as the first.

25

Each excitation block may comprise a first excitation sub-block and a second excitation sub-block, the response to one of the first and second sub-blocks in one block being compared to the response to one of the first and second sub-blocks in the other block. This can afford the advantage that by dividing the blocks into sub-blocks the off-
30 resonance performance of the entire sequence can be enhanced, especially if the sub-blocks in each main block are different. Preferably, the response to the other of the first and second sub-blocks in one block is compared to the response to the other of the first and second sub-blocks in the other block as well.

WO 99/19740

PCT/GB98/03099

- 8 -

This important feature is provided independently. Accordingly, the invention provides a method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the method comprising applying two excitation blocks to excite nuclear quadrupole resonance, each
5 excitation block comprising a first excitation sub-block and a second excitation sub-block, there being a given delay time between the two blocks, detecting resonance response signals, and comparing the response to one of the first and second sub-blocks in one block and the response to one of the first and second sub-blocks in the other block, the delay time being less than five times the T_1 value of the nuclei (that is, a
10 delay which gives insufficient time for the magnetization to recover).

Preferably, the delay time is less than three times or twice the T_1 value of the nuclei; and more preferably the delay time is less than the T_1 value itself. Advantageously, the delay time is less than half, preferably less than a quarter, more preferably less than
15 a tenth and even more preferably less than a hundredth of the T_1 value.

The first sub-block in each excitation block may be different from the second sub-block in each excitation block. For example, each sub-block may comprise a plurality of pulses, and the repetition rate of the pulses in the first sub-block may be different from
20 the repetition rate of the pulses in the second sub-block. This can make the off-resonance response different between the first and the second sub-blocks, so that the combined off-resonance response can be improved.

If each excitation block comprises a plurality of excitation pulses, preferably the time
25 between the first and second such pulse in the first block is different from the corresponding time for the second block. This has been found to be a particularly effective way of improving the off-resonance performance of the combined response signal from the first and second blocks.

30 For efficiency and optimum reduction in spurious signals, preferably each excitation block comprises a multiplicity of excitation pulses and at least the majority of the pulses in one block are substantially the same as the corresponding pulses in the other block.

WO 99/19740

PCT/GB98/03099

- 9 -

One multiple pulse sequence of particular efficiency has been found to be a Pulsed Spin Locking (PSL) type sequence. In putting such a sequence into practice with the present invention, preferably each block comprises an initial preparation pulse followed by at least one pulse of different phase from the preparation pulse.

5

The feature that the time between the first and second such pulse in the first block is different from the corresponding time for the second block can be used particularly effectively in the context of a PSL type sequence. Accordingly, preferably, for one of the blocks the time between the preparation pulse and the immediately following pulse is half the time between subsequent pulses in the block, whereas preferably for (the other) one of the blocks the time between the preparation pulse and the immediately following pulse is substantially the same as the time between subsequent pulses in the block.

10

15 Another particularly effective pulse sequence in the context of the present invention is a Steady State Free Precession (SSFP) type sequence. In putting this sequence into practice for the present invention, preferably each excitation block comprises a plurality of excitation pulses, the time between each such pulse being the same.

20 In fact, repeated use of an SSFP type pulse sequence in a T_1 limited fashion has been found - surprisingly - to afford a number of benefits in reducing spurious interfering signals. Accordingly, the present invention provides a method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the method comprising:

25 applying two (or more) excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks, each excitation block comprising a plurality of excitation pulses, the time between each such pulse being the same; and

detecting resonance response signals;

30 wherein the delay time is less than five times the T_1 value of the nuclei.

Preferably, the delay time is less than three times or twice the T_1 value of the nuclei; and more preferably the delay time is less than the T_1 value itself. Advantageously,

WO 99/19740

PCT/GB98/03099

- 10 -

the delay time is less than half, preferably less than a quarter, more preferably less than a tenth and even more preferably less than a hundredth of the T_1 value.

The method may further comprise comparing the response signals from the respective
5 blocks.

One particular preferred embodiment has been found to be where the phase of each pulse is the same. Also, if a plurality of pulses is provided in each block (or sub-block), preferably each (or most) of the pulses in that block (or sub-block) has the same
10 or nearly the same phase; this may exclude the initial pulse in each block, which may be of a different phase. Preferably each (or most) of the pulses in that block (or sub-block) have phases which are within 90° of each other.

Each excitation block may comprise at least one excitation pulse, and at least one of
15 the pulses may be a phase split pulse.

Although reference has been made above largely to the use of two excitation blocks, one or more further pairs of blocks with the appropriate delay (for example, less than the T_1 value of the nuclei, as taught previously) between each block of the pair could
20 be used. Each pair of blocks may have substantially the same delay between the blocks, or the delays may be different. Each pair may be applied at a (slightly) different excitation frequency, in order to improve off-resonance performance.

The invention also provides apparatus for Nuclear Quadrupole Resonance testing a
25 sample containing quadrupolar nuclei, comprising:

means (such as an rf probe) for applying two (or more) excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks;

means (such as the or another rf probe) for detecting resonance response signals
30 from the blocks; and

means (such as a processor) for comparing the response signals from the respective blocks;

wherein the delay time is between 1 and 1000ms, preferably between 5 and

WO 99/19740

PCT/GB98/03099

- 11 -

500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

Preferably, the first and second blocks, and the delay time therebetween, are arranged such that if the resonance frequency of the nuclei were varied over a given range, the first and second blocks would generate response signals whose variation with frequency over the given range would in combination be less than for the response signals from separately either the first or second block.

10 Preferably, the excitation applying means is adapted to apply excitation between the two excitation blocks. The excitation applying means may be adapted to apply an excitation pulse at a time substantially coincident with the last echo generated by the first block. The excitation applying means may be adapted to apply an excitation pulse at a time adjacent the centre of the delay time between the two blocks. The excitation
15 applying means may be adapted to apply an excitation pulse between the two blocks and the pulse may have an effective flip angle of between 20° and 160° , or 200° and 340° , or 30° and 60° , or 70° and 110° , or 160° and 200° . The excitation applying means may be adapted to apply a plurality of excitation pulses between the two blocks, the second such pulse being of the same or different flip angle as the first.

20

Each excitation block may comprise a first excitation sub-block and a second excitation sub-block, and the comparing means may be adapted to compare the response to one of the first and second sub-blocks in one block and the response to one of the first and second sub-blocks in the other block.

25

In a closely related apparatus aspect of the present invention there is provided apparatus for Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , comprising means for applying two excitation blocks to excite nuclear quadrupole resonance, each
30 excitation block comprising a first excitation sub-block and a second excitation sub-block, there being a given delay time between the two blocks, means for detecting resonance response signals, and means for comparing the response to one of the first and second sub-blocks in one block and the response to one of the first and second sub-

WO 99/19740

PCT/GB98/03099

- 12 -

blocks in the other block, the delay time being less than five times T_1 , for example, between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

- 5 The first sub-block in each excitation block may be different from the second sub-block in each excitation block. For example, each sub-block may comprise a plurality of pulses, and the repetition rate of the pulses in the first sub-block may be different from the repetition rate of the pulses in the second sub-block.

- 10 The present invention also provides apparatus for Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei, comprising:

means for applying two (or more) excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks, each excitation block comprising a plurality of excitation pulses, the time between each such pulse

- 15 being the same; and

means for detecting resonance response signals;

the delay time being less than five times T_1 , for example, between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

20

One particular preferred embodiment has been found to be where the phase of each pulse is the same.

- 25 Preferably, means for comparing the response signals from the respective blocks are provided.

Method and apparatus features of the invention may where appropriate be interchanged.

- 30 Preferred features of the present invention will now be described, purely by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows the off-resonance response of a typical NQR substance to a multiple pulse sequence which is not T_1 limited;

WO 99/19740

PCT/GB98/03099

- 13 -

Figure 2 shows a block diagram of a preferred embodiment of NQR apparatus;

Figure 3 shows the off-resonance response of a typical NQR substance to a first preferred embodiment of T_1 limited pulse sequence;

Figure 4 is an equivalent figure for a second preferred embodiment of pulse
5 sequence;

Figure 5 is an equivalent figure for a fourth preferred embodiment of pulse sequence;

Figures 6 to 9 are equivalent figures for a fifth preferred embodiment of pulse sequence under a variety of different conditions;

10 Figure 10 illustrates the pulse sequence employed in the generation of the plot of Figure 9;

Figure 11 is a figure equivalent to Figure 3 using the sixth and seventh preferred embodiment of pulse sequence together; and

Figure 12 illustrates a phase split pulse.

15

Preferred Embodiment of Apparatus

Referring first to Figure 2, a preferred embodiment of apparatus for NQR testing includes a radio-frequency source 11 connected via a phase/amplitude control 10 and a gate 12 to an rf power amplifier 13. The output of the latter is connected to an rf
20 probe 14 which contains one or more rf coils disposed about or adjacent to the sample to be tested (not shown), such that the sample can be irradiated with rf pulses at the appropriate frequency or frequencies to excite nuclear quadrupole resonance in the substance under test (for example, an explosive). The rf probe 14 is also connected to rf receiver and detection circuitry 15 for detecting nuclear quadrupole response
25 signals. The detected signal is sent from circuitry 15 to a control computer 16 (or other control apparatus) for processing, and for signal addition or subtraction. The computer includes some means 17 for producing an alarm signal in dependence upon whether a given threshold of detection for the presence of the particular substance of interest has been exceeded. The alarm signal would normally be used to activate an
30 audio or visual alarm to alert the operator to the presence of the substance under test.

The control computer 16 also controls all pulses, their radio frequency, time, length, amplitude and phase. In the context of the present invention all of these parameters

WO 99/19740

PCT/GB98/03099

- 14 -

may need to be adjusted precisely; for example, phase may need to be varied in order to be able to generate echo responses.

Re-tuning of the rf probe 14, alteration of its matching and alteration of its Q factor may all need to be carried out dependent upon the nature of the sample. These functions are carried out by the control computer 16 as follows. Firstly, the computer checks the tuning of the rf probe 14 by means of a pick-up coil 18 and rf monitor 19, making adjustments by means of the tuning control 20. Secondly, the matching to the rf power amplifier 13 is monitored by means of a directional coupler 21 (or directional wattmeter), which the computer responds to via a matching circuit 22, which in turn adjusts the rf probe 14 by means of a variable capacitance or inductance. The directional coupler 21 is switched out by the computer 16 when not required, via switch 23. Thirdly, the Q factor of the rf coil is monitored by a frequency-switch programme and adjusted by means of a Q-switch 24 which either changes the coil Q or alternatively alerts the computer to increase the number of measurements.

The control computer 16 may be programmed in various ways to reduce or eliminate the spurious interference described above by controlling the pulse amplitudes and phases by means of the control 10. These ways involve the use of a comparator 25 for comparing the response signals from different pulses by making appropriate changes to the phase of the receiver and detection circuitry 15, and passing the resultant signals to the remainder of the control computer 16 for further processing.

Shown diagrammatically in Figure 2 and designated as 27 is some means, such as a conveyor belt, for transporting a succession of samples to a region adjacent the rf probe 14. The computer 16 is arranged to time the application of the excitation pulses substantially simultaneously with the arrival of a particular sample adjacent the probe. In alternative embodiments, instead of the sample being carried on a conveyor belt, it may actually be a person, and the rf probe may be in the form of a walk-through gateway or a hand-held wand.

The apparatus described above may employ simple rectangular pulses, although other pulse shapes may be employed, and each pulse described herein may be substituted by

WO 99/19740

PCT/GB98/03099

- 15 -

one or more suitable composite pulses. For example, the phase split pulses disclosed in WO 96/26453 (see the section entitled "Third variant of the first embodiment - phase split pulses", as well as Figures 2b to 2d) could be used in order to improve the excitation bandwidth. In the preferred embodiment these phase split pulses would be modified by removing the initial preparation pulse (for a disclosure of the initial preparation pulse see page 21 lines 27 to 30 of WO 96/26453).

Furthermore, although usually the radio-frequency probe would utilise a single coil for both transmission and reception of signals, any appropriate number of coils may be used, and different coils can be used for transmission and reception. Also, the apparatus would usually operate in the absence of any applied magnetic field.

First Preferred Embodiment of Pulse Sequence

In a first preferred embodiment of pulse sequence, two blocks of excitation pulses are applied to a sample, each block comprising a Steady State Free Precession (SSFP) excitation pulse sequence with no phase alternation. The resonance response signals from the two blocks are compared in appropriate fashion such that the spurious interfering signals are reduced whilst the genuine NQR signals are enhanced. Typically a difference or a weighted difference of the two response signals is determined.

In the general case, a single block may be written as

$$(P\alpha_{+y} - \tau)^{acq}_n$$

where P indicates a pulse of flip angle α and phase $+y$, τ is the time between pulses and n is the number of pulse repetitions. The superscript "acq" indicates that response signals are acquired for all pulses. In one particular example, $\alpha = 90^\circ$, $y = 0^\circ$, $\tau = 2\text{ms}$ and $n = 2000$, although other values may be used; for example, α may typically take any value equal to or less than 180° . In one minor variant, a final pulse may be added after the "n" acquisitions, so that the sequence ends on a pulse rather than notionally on a delay; this is for bookkeeping purposes. This variant may be applied to all the pulse sequences disclosed herein.

WO 99/19740

PCT/GB98/03099

- 16 -

In one variant, the phases of the various pulses are varied in accordance with the teachings of WO 96/26453 (see the sections entitled "second variant of the second embodiment" and "third variant of the second embodiment"), with phase varying within each individual block and also between the two blocks of the overall sequence.

- 5 In that variant, the response signals from the various blocks are combined in the manner disclosed in WO 96/26453. However, that particular variant involves for each pulse a switching of the phase of the excitation pulse relative to the previous pulse. When the decay time of the spurious signals is long, that variant may not be effective in eliminating such signals since in such circumstances there can only be cancellation
- 10 of the spurious signal generated by the immediately preceding pulse. Hence, in a preferred variant the phases of all of the pulses in both of the blocks are the same, and further details of this variant are now provided.

- In the case where the phases of all of the pulses in both of the blocks are the same and
- 15 indeed all of the pulses are identical, subtracting the response signals of the second block from those of the first block would be expected to result in complete cancellation of the genuine NQR signals as well as the spurious interfering signals. However - contrary to expectation - it has been discovered that by having a delay time Δ between excitation blocks of less than say T_1 , so that the system is not fully relaxed prior to the
- 20 application of the second excitation block, firstly the second block generates response signals of significant strength and secondly subtraction of the two response signals may - fortuitously - actually yield a non-zero residual signal, whilst still, of course, reducing spurious signals. The reason for this phenomenon is not well understood, but what is relatively clear is that an SSFP pulse sequence in NQR is in some way able to
- 25 regenerate magnetisation in the z direction (that is, at right angles to the direction of the B_1 field generated by the excitation pulses) in a time less than 3 or 5 T_1 .

- The value of the delay time Δ between the blocks which produces the optimum residual NQR signal (once the response signal of the second block has been subtracted from that
- 30 of the first block) has been the subject of considerable investigation. It appears that the prime function of the delay is to modify the magnetization between the first and second blocks, and to modify phase and/or frequency. It has been found that the important criteria in achieving this are as follows. Firstly, the value must be very much less than

WO 99/19740

PCT/GB98/03099

- 17 -

- T_1 ; otherwise the result of the subtraction is a zero residual signal. Secondly, the value must be sufficiently large for the magnetization in the x-y plane to dephase to a significant extent. Hence the value is suitably greater than once, twice, three or five times T_2 . Thirdly, however, the value should not be too great since this would make
- 5 the total duration of the test too long. A preferred range is 1 to 5 times T_2 , and more preferably 2 to 4 (or 5) times T_2 . Fourthly, the value of Δ is advantageously at least the excitation pulse separation time (τ), and it is preferably at least 2, 3 or 5 times the pulse separation time. Otherwise, subtracting the response signals of the second block from those of the first can result in complete cancellation of the genuine NQR signals.
- 10 Fifthly and finally, a further upper limit on Δ is that it is advantageously no greater than, say, 2, 3 or 5 times T_{2e} , the echo decay time.

These criteria and observations concerning the delay time Δ apply equally to all embodiments described herein.

15

- It is believed that an important further function of the delay is to shift somewhat the relative locations of the frequency peaks and troughs which would be generated by the first and second blocks, so that the peaks generated by the first block would generally coincide with the troughs generated by the second block. Introducing a delay can be
- 20 viewed as introducing a variation to phase and/or frequency.

- Figure 3 shows the off-resonance response of a typical substance (such as PETN) when the pulse sequence of the preferred variant (all phases identical) of the first preferred embodiment is used. In this example, the time delay, Δ , between the two blocks was
- 25 roughly $3T_2$. The actual signal shown (in common with that shown in Figure 1) is the residual signal obtained by subtracting the response signal of the second block from that of the first block. However, in contrast to the situation shown in Figure 1 (where a time delay of greater than T_1 is left between the two blocks), the pulses in the pulse sequences used to produce the responses have identical phase, and hence subtracting
- 30 the respective responses would be expected to give no residual signal. However, it can be seen that, unexpectedly, a useable off-resonance response is nonetheless produced.

The off-resonance response may be further improved by using the techniques of the

WO 99/19740

PCT/GB98/03099

- 18 -

other preferred embodiments, and especially of the fourth and/or fifth and/or sixth embodiment, as will be discussed later.

Second Preferred Embodiment of Pulse Sequence

- 5 In a second preferred embodiment of pulse sequence, both excitation blocks comprise Pulsed Spin Locking (PSL) pulse sequences. As was described in WO 96/26453 (see the first variant of the second embodiment), PSL sequences can provide efficient discrimination against many kinds of spurious response, with appropriate cycling of the phase of the individual pulses. In a typical PSL sequence, each block has its own preparation pulse, P_1 , followed by a sequence of identical pulses, P_2 , differing in phase typically by 90° from P_1 . In a two-block sequence, block 1 is written in general terms as

$$P_1\alpha_{+x} - \tau - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

15

and block 2 is the phase-cycled version

$$P_1\alpha_{-x'} - \tau - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

- 20 In this case the preparation pulse is followed by m pulses during which response signals are preferably not acquired (in order to allow sufficient time for the spurious interfering signals following the preparation pulse to decay, given that such signals cannot be eliminated since the pulse is of different phase), and then n pulses during which response signals are acquired. The phase $-x'$ of the preparation pulse in block
- 25 2 may be 180° different from that $(+x)$ of the first block (that is $x = -x' = 90^\circ$), although other values may be used, especially if a more complete cycling of phases is carried using more than two excitation blocks. The relative phase $+y$ of the subsequent pulses would typically be zero, although again other values are possible.
- 30 In a two block sequence, the response from one block is subtracted from the other. If phase-cycling is used then the responses from blocks having preparation pulses which differ by 180° are subtracted from each other, and the resultant residual signals are added.

WO 99/19740

PCT/GB98/03099

- 19 -

As described in WO 96/26453, the above sequence can produce a 33 dB rejection of spurious responses. Such a sequence can allow spurious responses generated by the P_2 -type pulses to be cancelled.

- 5 As with the first preferred embodiment, in the second preferred embodiment, two blocks of PSL pulses are applied with a delay time Δ between the two blocks of less than T_1 . Again, the optimum value of the delay time has been found to be about one to five times T_2 , although other values may be used.
- 10 Values of m and n may typically be in the ranges 2 to 8 and 200 to 10000 respectively, although other values are possible. Particularly preferred values of m and n are 4 and 2000 respectively.

- Figure 4 shows the off-resonance response of a typical substance when the pulse sequence of the second preferred embodiment is used. In this example, the time delay, Δ , between the two blocks was again roughly $3T_2$. The actual signal shown (in common with that shown in Figure 1) is the residual signal obtained by subtracting the response signal of the second block from that of the first block. It can be seen that the peaks are wider and the troughs narrower than in the response for the comparable PSL blocks where the delay time between blocks is greater than T_1 , this being the situation shown in Figure 1. This is particularly advantageous where the precise temperature of the sample, and therefore the required excitation frequency, is not known.

- It is noted that the PSL sequence described above, unlike the SSFP sequence of the first embodiment, involves a phase change between the first and second excitation blocks, so that (again unlike the SSFP sequence) a subtraction of the response signals of the second block from those of the first block yields a non-zero result, even for a T_1 limited sequence.

30 Third Preferred Embodiment of Pulse Sequence

The third preferred embodiment of pulse sequence is similar to the second, except that the delay between the preparation pulse (at least for one of the blocks, and preferably the first block) and the subsequent pulses is different. The purpose of such a variation

WO 99/19740

PCT/GB98/03099

- 20 -

to the PSL sequence known from WO 96/26453 is to shift somewhat the locations of the frequency peaks and troughs which would be generated by the first and second blocks, so that the peaks generated by the first block would generally coincide with the troughs generated by the second block. Introducing a variation to the pulse separation
 5 can be viewed as introducing a variation to phase and hence frequency.

Block 1 may be written as

$$P_1 \alpha_{+x} - \tau' - (P_2 \alpha_{+y} - 2\tau)_m - (P_2 \alpha_{+y} - 2\tau)^{acq}_n$$

and block 2 is the phase-cycled version

$$P_1 \alpha_{-x} - \tau'' - (P_2 \alpha_{+y} - 2\tau)_m - (P_2 \alpha_{+y} - 2\tau)^{acq}_n$$

- 15 In the preferred variant of the third embodiment, τ' is equal to 2τ , although it may have a value in the range of, say 1.5 to 2.5 τ . Nonetheless, the value of 2τ is viewed as being particularly preferable. In this preferred variant, τ'' would equal τ , although other values are possible.
- 20 In other preferred variants, the variation of pulse separation may take place in the second block rather than the first (that is, τ'' would most preferably be equal to 2τ). However, since the overall signal generated by the second block is likely to be less than that generated by the first block, such a variant is less preferred. Again, both τ' and τ'' may be different from the values described in relation to the second preferred
 25 embodiment.

Fourth Preferred Embodiment of Pulse Sequence

- In the fourth preferred embodiment of pulse sequence, one or more so-called "refocussing" pulses are applied in the delay time Δ between the two excitation blocks.
- 30 The excitation blocks may be the blocks of any of the first three preferred embodiments, in any suitable combination.

The refocussing pulse is preferably located at the maximum of the last echo generated

WO 99/19740

PCT/GB98/03099

- 21 -

by the first block (that is, at a time τ after the last pulse), although the pulse could be applied at other delays after the end of the first excitation block. The purpose of the refocussing pulse is to restore some or all of the magnetization in the x-y plane to the z-direction; this then restores the spin system ready for the second excitation block.

- 5 Although it might be thought that in order to refocus magnetization from the x-y plane to the z-direction a $90^\circ_{\text{effective}}$ flip angle would be most preferred, in fact a whole range of flip angles has in practice been found to function successfully. Preferred ranges of effective flip angle for the refocussing pulse are between 20° and 340° and preferably either between 30° and 60° or between 70° and 110° or between 160° and 200° . In
- 10 one example the refocussing pulse has an effective flip angle of 45° . In another example the flip angle is 90° . In a further example, a 90° pulse is used at the maximum of the echo from the last pulse in the block, to put the magnetisation back into the z-direction, and then a 45° pulse is used to put the magnetisation back into the x-y plane in the opposite direction.

- 15 When using a refocussing pulse, a relatively short total delay time between the two excitation blocks may be used (perhaps equal to or (somewhat) greater than 4τ , 2τ in this case being the pulse separation time).
- 20 The phase of the refocussing pulse has been found to be relatively unimportant in situations of practical interest, although it is preferred that the pulse be of opposite phase to the phase of the first pulse of the first block.

- Figure 5 shows the off-resonance response of a typical substance when two PSL blocks
- 25 of the second embodiment are used, and a refocussing pulse of flip angle 45° is applied between the two blocks. The total time delay, Δ , between the two blocks was again roughly $3T_2$. The actual signal shown (in common with that shown for example in Figure 1) is the residual signal obtained by subtracting the response signal of the second block from that of the first block. It can be seen that the use of a refocussing
- 30 pulse gives an improvement in the response by comparison with the response shown in Figure 4.

WO 99/19740

PCT/GB98/03099

- 22 -

Fifth Preferred Embodiment of Pulse Sequence

- In a fifth preferred embodiment, one or more pulses of preferably 180° effective flip angle, termed "windmill" pulses, are applied between the two excitation blocks, with the delay between the end of the first block and the first such windmill pulse, and the delay between the first windmill pulse and any subsequent other pulses, being between preferably one and five times T_2 , and more preferably two and four times T_2 . The excitation blocks may be the blocks of any of the first three preferred embodiments. The purpose of at least the initial windmill pulse is to modify the phase component of the magnetization as well as to drive it back along the z-direction. The purpose of the further such pulses is to store the magnetization between the blocks. It can be seen that one function of the windmill pulses is to introduce an effective phase shift (and hence frequency shift) between the first and second blocks, so that the peaks generated by the first block would generally coincide with the troughs generated by the second block.
- For example, based on a value of $3T_2$ of 40ms, four windmill pulses may be applied with a delay of 40ms between each, giving a total delay time between the two excitation blocks of about 200ms. It is important that this total time be considerably less than T_1 .
- The number of windmill pulses has been found not to be critical. Better results are obtained with two or more such pulses than with just one such pulse, although five or more pulses do not make an appreciable difference. Nonetheless, larger numbers of pulses may be useful if it is desired to store the magnetization any longer, for example, in case it were desired to switch frequency between the first and second blocks.
- The flip angle of the windmill pulses is preferably close to 180° (so as to achieve the necessary phase change for the second excitation block), and may be typically in the range 150 to 210° although it may be even as low as 30 to 90° . The phase of the pulses has been found to be relatively unimportant, although "+x" is preferred.
- Figure 6 shows the off-resonance response of a typical substance when two PSL blocks of the second preferred embodiment are used and a single windmill pulse applied between the blocks. Figure 7 shows the off-resonance response of a typical substance

WO 99/19740

PCT/GB98/03099

- 23 -

when two PSL blocks of the third preferred embodiment are used and a windmill pulse applied between the blocks. It can be seen that in both cases there is a significant improvement in the response, with the improvement being better in the case of Figure 7.

5

Figures 8 and 9 show the off-resonance response of a typical substance when two SSFP blocks of the first preferred embodiment are used and windmill pulses applied between the blocks. In the case of Figure 8 a single windmill pulse was used, while in the case of Figure 9 four windmill pulses were used. It can be seen that in both cases there is a significant improvement in the response.

10

The overall pulse sequence employed in the generation of the plot of Figure 9 is illustrated in Figure 10. This figure shows the number, spacing, phase and flip angle of the various pulses in the first, second and bridging blocks of pulses.

15

Sixth Preferred Embodiment of Pulse Sequence

According to a sixth preferred embodiment, a number of so-called "saturation pulses" are applied in the delay time between the two excitation blocks. The excitation blocks may be any of the blocks of any of the first three embodiments, in any combination.

20 Saturation pulses scramble the NQR spins so that the net energy difference in the NQR system is zero, with the result that no NQR signal can be detected.

In order to achieve saturation, two or more 90° effective pulses may be employed, typically with a variable delay between the pulses. Typically, at least two, three, five or ten such pulses might be applied. For example, eleven 90° effective pulses might be applied, with a short but variable delay (for example, between 100 μ s and 50 ms) between each pulse.

25

The result of applying the saturation pulses is that substantially no signal is detected from the second excitation block; however, spurious signals are not substantially affected by the saturation pulses (since they are not NQR signals). Therefore, in the present embodiment, comparing the responses from the respective blocks will result in a reduction in the spurious signals while leaving the NQR signal from the first block

30

WO 99/19740

PCT/GB98/03099

- 24 -

substantially unaltered.

Seventh Preferred Embodiment of Pulse Sequence

According to a seventh preferred embodiment, two pairs of excitation blocks (or sub-
5 blocks) are applied, with the pairs interleaved such that one sub-block of each pair acts
as the bridging element for the other pair. Such a sequence may be written in general
terms as

SUB-BLOCK 1 - Δ - SUB-BLOCK 2 - Δ - SUB-BLOCK 3 - Δ - SUB-BLOCK 4

10

Sub-blocks 1 and 3 make up one pair of identical blocks of pulses, and sub-blocks 2
and 4 another identical pair (which may or may not be the same as the first pair). The
sub-blocks may be the blocks of any of the first three preferred embodiments, in any
appropriate combination.

15

The response from sub-block 1 is compared to that from sub-block 3, and the response
from sub-block 2 is compared to that from sub-block 4, and the compared responses
are then combined. Such sequences have the advantage that the second and third sub-
blocks act as bridging elements, and are also used to acquire signal responses.

20

Another way of viewing the seventh embodiment is that sub-blocks 1 and 2 as defined
immediately above form a first main block and that sub-blocks 3 and 4 form a second
main block, there being a delay between the first and second main blocks which may
include bridging pulses if required. Accordingly, the first and second main blocks and
25 the delay therebetween effectively form the basic sequence of

FIRST BLOCK - BRIDGING ELEMENT - SECOND BLOCK

Preferably, one pair of sub-blocks uses a different pulse sequence from the other pair
30 of sub-blocks, so that the resonance response profile obtained from the two pairs of
sub-blocks is different. For example, the delay between the pulses in one pair of sub-
blocks may be different from the delay between the pulses in the other pair of sub-
blocks, or the lengths of the pulses may be different, or the phases may be different.

WO 99/19740

PCT/GB98/03099

- 25 -

Advantageously, by judicious choice of elements in the sub-blocks the peaks in one response profile are arranged to coincide as far as possible with the troughs of the other response profile. Thus, combining the respective resonance response profiles results in an improved overall off-resonance response.

5

Other bridging pulses, such as one or more refocussing pulses of the fourth preferred embodiment and/or one or more windmill pulses of the fifth preferred embodiment and/or the saturation pulses of the sixth preferred embodiment, may be applied between the excitation sub-blocks of a pair. Preferably, any such pulses are applied between sub-block 2 and sub-block 3, so that they act as bridging pulses for both pairs of excitation sub-blocks, although they may alternatively or additionally be applied between sub-blocks 1 and 2, and sub-blocks 3 and 4.

In a particularly preferred example of the seventh preferred embodiment, the following pulse sequence is used.

$$(P_y - \tau_1 - P_y)_n - \Delta - (P_y - \tau_2 - P_y)_n - \Delta - (P_x - \delta)_m - (P_y - \tau_1 - P_y)_n - \Delta - (P_y - \tau_2 - P_y)_n$$

(1) (2) (3) (4)

This pulse sequence consists of one pair of sub-blocks (1) and (3) having a delay τ_1 between the pulses interleaved with another pair of sub-blocks (2) and (4) having a delay τ_2 between the pulses, where $\tau_1 \neq \tau_2$. A number m of saturation pulses are applied between sub-blocks 2 and 3. The delays Δ between the sub-blocks may or may not be the same.

25

In order to increase off-resonance performance, the pulse repetition rate may differ between the two pairs of sub-blocks. This may be achieved either by setting $\tau_1 \neq \tau_2$ (as just described) or by varying the pulse length, or both.

There is a variable delay δ between each saturation pulse, in order to suppress echoes.

Figure 11 shows the off-resonance response of a typical substance when the above excitation sequence is used. It can be seen that there is a significant improvement in

WO 99/19740

PCT/GB98/03099

- 26 -

the response over Figure 1.

In the example shown in Figure 11, each pulse is a phase split pulse similar to those described above, and as shown in Figure 12. Each pulse has a total length of 400 μ s, a B_1 field of 0.1 mT, $\Delta = 40$ ms and δ is varied randomly between 100 μ s and 50 ms in order to suppress echoes. τ_1 is 2.6 ms and τ_2 is 3.9 ms. This has the effect of overlapping the responses of two sequences having differing repetition rates.

Taking as a whole the results shown in Figures 3 to 9 and 11, it can be seen that (dependent perhaps upon the particular substance being examined): a) short delays between blocks ($< T_1$) give better performance (defined in this instance as a weaker offset dependence) than long delays ($\sim T_1$ and above); b) the addition of a pulse of a given length and a given phase between the blocks improves performance; c) an 180° "effective" pulse with a phase of $+x$ gives best results; d) these pulses can be used singly or in sets of two or more in combination with delays of various lengths from τ to something less than T_1 , without any great penalty in intensity drop-off (effectively allowing magnetization to be "stored" between blocks); and, finally, e) SSFP gives a better performance than PSL in all circumstances except the use of a simple, short delay. With the best results, any remaining troughs in the frequency characteristic are unlikely to be of practical consequence.

In these experiments, when using a single pair of blocks, SSFP blocks with four windmill pulses were found to give the best results, while using two pairs of sub-blocks in the manner described in the seventh preferred embodiment gave the best overall results.

Any of the preferred embodiments may be used in combination with any of the other preferred embodiments. For example the windmill pulses may also be used in combination with the refocusing pulse of the fourth preferred embodiment. Furthermore, a PSL first block may be combined with a SSFP second block, and *vice versa*.

In any of the preferred embodiments, the phases of the pulses may be cycled as taught

WO 99/19740

PCT/GB98/03099

- 27 -

in WO 96/ 26453.

In summary, the present technique may be represented in general terms as

5 FIRST BLOCK - BRIDGING ELEMENT - SECOND BLOCK

The first block may comprise any of the following pulse sequences

$$(P\alpha_{+y} - \tau)^{acq}_n$$

10

$$P_1\alpha_{+x} - \tau - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

$$P_1\alpha_{+x} - \tau' - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

The bridging element may comprise any of the following elements (in any number)

15

$$\Delta$$

$$\Delta - P\theta_\phi$$

20

$$\Delta - (P180_\phi - \Delta)_n$$

$$\Delta - (P90_\phi - \delta)_n$$

or any combination thereof, where Δ and δ are delays (δ being shorter than, preferably
25 much shorter than, Δ), θ is an arbitrary flip angle and ϕ is arbitrary phase.

The second block may comprise any of the following pulse sequences

$$(P\alpha_{+y} - \tau)^{acq}_n$$

30

$$P_1\alpha_{+x} - \tau - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

$$P_1\alpha_{+x} - \tau' - (P_2\alpha_{+y}-2\tau)_m - (P_2\alpha_{+y}-2\tau)^{acq}_n$$

WO 99/19740

PCT/GB98/03099

- 28 -

The techniques described above give spurious signal suppression and allow excitation to be used off-resonance, and are particularly advantageous in the detection of substances with low NQR frequencies and high values of T_1 . The techniques provide the additional advantage of requiring a short detection time. The techniques are
5 therefore well suited to detection in non-laboratory environments such as in airports and minefields, and to the detection of substances such as PETN, TNT and KNO_3 .

It will be understood that the present invention has been described above purely by way of example, and modifications of detail can be made within the scope of the invention.
10

Each feature disclosed in the description, and (where appropriate) the claims and drawings may be provided independently or in any appropriate combination.

Any reference numerals appearing in the claims are by way of illustration only and
15 shall have no limiting effect on the scope of the claims.

WO 99/19740

PCT/GB98/03099

- 29 -

CLAIMS

1. A method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the
5 method comprising:
 applying two excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks;
 detecting resonance response signals; and
 comparing the response signals from respective blocks;
10 wherein the delay time is less than the T_1 value of the nuclei.
2. A method according to claim 1 wherein the delay time is less than half, preferably less than a quarter, more preferably less than a tenth and even more preferably less than a hundredth of the T_1 value.
15
3. A method according to claim 1 or 2 wherein the nuclei exhibit a given value of spin-spin relaxation time, T_2 , and the delay time is greater than once, preferably greater than twice, more preferably greater three times and even more preferably greater than five times the T_2 value.
20
4. A method according to claim 3 wherein the delay time is less than ten times and preferably less than five times the T_2 value.
5. A method according to any of the preceding claims wherein the delay time is
25 between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.
6. A method according to any of the preceding claims wherein the first and second blocks, and the delay time therebetween, are arranged such that, if the resonance
30 frequency of the nuclei were varied over a given range, the first and second blocks would generate response signals whose variation with frequency over the given range would in combination be less than for the response signals from separately either the first or second block.

WO 99/19740

PCT/GB98/03099

- 30 -

7. A method according to any of the preceding claims further comprising applying excitation between the two excitation blocks.
8. A method according to claim 7 wherein an excitation pulse is applied at a time
5 substantially coincident with the last echo generated by the first block.
9. A method according to claim 7 or 8 wherein an excitation pulse is applied at a time adjacent the centre of the delay time between the two blocks.
- 10 10. A method according to any of claims 7 to 9 wherein an excitation pulse is applied between the two blocks and the pulse has an effective flip angle of between 20° and 160° , or 200° and 340° , or 30° and 60° , or 70° and 110° , or 160° and 200° .
11. A method according to any of claims 7 to 10 wherein a plurality of excitation
15 pulses is applied between the two blocks, the second such pulse being of the same or different flip angle as the first.
12. A method according to any of claims 7 to 10 wherein excitation pulses are applied between the excitation blocks to provide saturation.
20
13. A method according to any of the preceding claims wherein each excitation block comprises a first excitation sub-block and a second excitation sub-block, the response to one of the first and second sub-blocks in one block being compared to the response to one of the first and second sub-blocks in the other block.
25
14. A method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the method comprising:
- 30 applying two excitation blocks to excite nuclear quadrupole resonance, each excitation block comprising a first excitation sub-block and a second excitation sub-block, there being a given delay time between the two blocks;
- detecting resonance response signals; and
- comparing the response to one of the first and second sub-blocks in one block

WO 99/19740

PCT/GB98/03099

- 31 -

and the response to one of the first and second sub-blocks in the other block;
wherein the delay time is less than five times the T_1 value of the nuclei.

15. A method according to claim 13 or 14 wherein the first sub-block in each
5 excitation block is different from the second sub-block in each excitation block.

16. A method according to claim 15 wherein each sub-block comprises a plurality
of pulses, and the repetition rate of the pulses in the first sub-block is different from
the repetition rate of the pulses in the second sub-block.

10

17. A method according to any of the preceding claims wherein each excitation
block comprises a plurality of excitation pulses, and the time between the first and
second such pulse in the first block is different from the corresponding time for the
second block.

15

18. A method according to any of the preceding claims wherein each excitation
block comprises a multiplicity of excitation pulses and at least the majority of the
pulses in one block are substantially the same as the corresponding pulses in the other
block.

20

19. A method according to any of the preceding claims wherein each block
comprises an initial preparation pulse followed by at least one pulse of different phase
from the preparation pulse.

25

20. A method according to claim 19 wherein for one of the blocks the time between
the preparation pulse and the immediately following pulse is half the time between
subsequent pulses in the block.

30

21. A method according to claim 19 or 20 wherein for one of the blocks the time
between the preparation pulse and the immediately following pulse is substantially the
same as the time between subsequent pulses in the block.

22. A method according to any of the preceding claims wherein each excitation

WO 99/19740

PCT/GB98/03099

- 32 -

block comprises a plurality of excitation pulses, the time between each such pulse being the same.

23. A method of Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , the method comprising:

applying two excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks, each excitation block comprising a plurality of excitation pulses, the time between each such pulse being the same; and detecting resonance response signals; wherein the delay time is less than five times the T_1 value of the nuclei.

24. A method according to claim 23 wherein the delay time is less than the T_1 value of the nuclei.

25. A method according to claim 23 or 24 further comprising comparing the response signals from the respective blocks.

26. A method according to any of the preceding claims wherein each excitation block comprises at least one excitation pulse, and the phase of each pulse is the same.

27. A method according to any of the preceding claims wherein each excitation block comprises at least one excitation pulse, and at least one of the pulses is a phase split pulse.

28. Apparatus for Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei, comprising:

means for applying two excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks;
means for detecting resonance response signals from the blocks; and
means for comparing the response signals from the respective blocks;
wherein the delay time is between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20

WO 99/19740

PCT/GB98/03099

- 33 -

and 60ms.

29. Apparatus according to claim 28 wherein the first and second blocks, and the delay time therebetween, are arranged such that if the resonance frequency of the nuclei were varied over a given range, the first and second blocks would generate response signals whose variation with frequency over the given range would in combination be less than for the response signals from separately either the first or second block.
30. Apparatus according to claim 28 or 29 wherein the excitation applying means is adapted to apply excitation between the two excitation blocks.
31. Apparatus according to claim 30 wherein the excitation applying means is adapted to apply an excitation pulse at a time substantially coincident with the last echo generated by the first block.
32. Apparatus according to claim 30 or 31 wherein the excitation applying means is adapted to apply an excitation pulse at a time adjacent the centre of the delay time between the two blocks.
33. Apparatus according to any of claims 30 to 32 wherein the excitation applying means is adapted to apply an excitation pulse between the two blocks and the pulse has an effective flip angle of between 20° and 160°, or 200° and 340°, or 30° and 60°, or 70° and 110°, or 160° and 200°.
34. Apparatus according to any of claims 30 to 33 wherein the excitation applying means is adapted to apply a plurality of excitation pulses between the two blocks, the second such pulse being of the same or different flip angle as the first.
35. Apparatus according to any of claims 28 to 34 wherein each excitation block comprises a first excitation sub-block and a second excitation sub-block, and the comparing means is adapted to compare the response to one of the first and second sub-blocks in one block and the response to one of the first and second sub-blocks in the

WO 99/19740

PCT/GB98/03099

- 34 -

other block.

36. Apparatus for Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei exhibiting a given value of spin-lattice relaxation time, T_1 , comprising:

means for applying two excitation blocks to excite nuclear quadrupole resonance, each excitation block comprising a first excitation sub-block and a second excitation sub-block, there being a given delay time between the two blocks;

means for detecting resonance response signals; and

- 10 means for comparing the response to one of the first and second sub-blocks in one block and the response to one of the first and second sub-blocks in the other block; wherein the delay time is less than five times T_1 , for example, between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

15

37. Apparatus according to claim 35 or 36 wherein the first sub-block in each excitation block is different from the second sub-block in each excitation block.

38. Apparatus according to claim 37 wherein each sub-block comprises a plurality of pulses, and the repetition rate of the pulses in the first sub-block is different from the repetition rate of the pulses in the second sub-block.

39. Apparatus according to any of claims 28 to 38 wherein each excitation block comprises a plurality of excitation pulses, and the time between the first and second such pulse in the first block is different from the corresponding time for the second block.

40. Apparatus according to any of claims 28 to 39 wherein each excitation block comprises a multiplicity of excitation pulses and at least the majority of the pulses in one block are substantially the same as the corresponding pulses in the other block.

41. Apparatus according to any of claims 28 to 40 wherein each block comprises an initial preparation pulse followed by at least one pulse of different phase from the

WO 99/19740

PCT/GB98/03099

- 35 -

preparation pulse.

42. Apparatus according to claim 41 wherein for one of the blocks the time between the preparation pulse and the immediately following pulse is half the time between subsequent pulses in the block.

43. Apparatus according to claim 41 or 42 wherein for one of the blocks the time between the preparation pulse and the immediately following pulse is substantially the same as the time between subsequent pulses in the block.

10

44. Apparatus according to any of claims 28 to 43 wherein each excitation block comprises a plurality of excitation pulses, the time between each such pulse being the same.

45. Apparatus for Nuclear Quadrupole Resonance testing a sample containing quadrupolar nuclei, comprising:

means for applying two excitation blocks to excite nuclear quadrupole resonance, there being a given delay time between the two blocks, each excitation block comprising a plurality of excitation pulses, the time between each such pulse being the same; and

means for detecting resonance response signals;

wherein the delay time is less than five times T_1 , for example, between 1 and 1000ms, preferably between 5 and 500ms, more preferably between 10 and 100ms and even more preferably between 20 and 60ms.

25

46. Apparatus according to claim 45 wherein the phase of each pulse is the same.

47. Apparatus according to claim 45 or 46 further comprising means for comparing the response signals from the respective blocks.

30

48. A method of Nuclear Quadrupole Resonance testing substantially as herein described with reference to any of the first to seventh preferred embodiments.

WO 99/19740

PCT/GB98/03099

- 36 -

49. Apparatus for Nuclear Quadrupole Resonance testing a sample substantially as herein described with reference to and as illustrated in Figure 2 or any of Figures 3 to 12 of the accompanying drawings.

WO 99/19740

PCT/GB98/03099

1/7

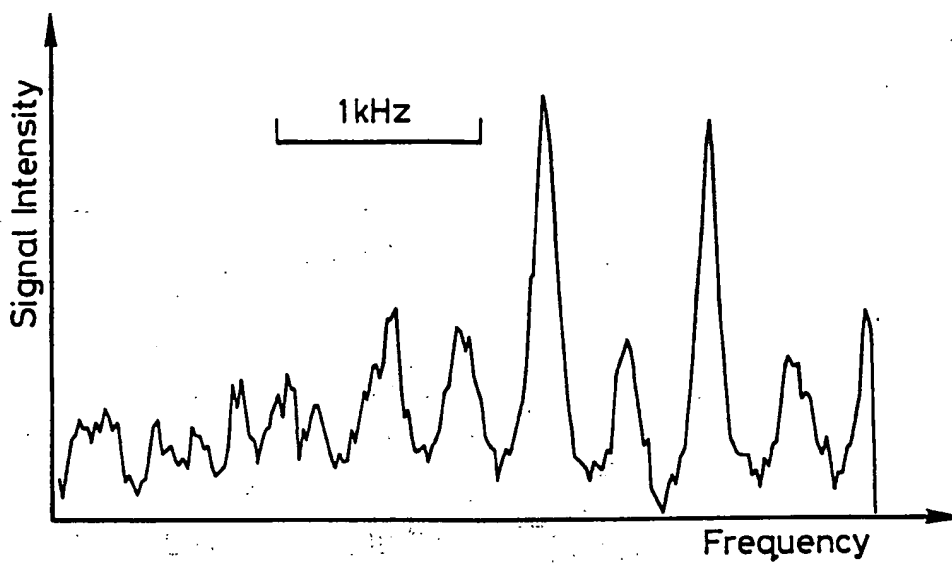


Fig. 1

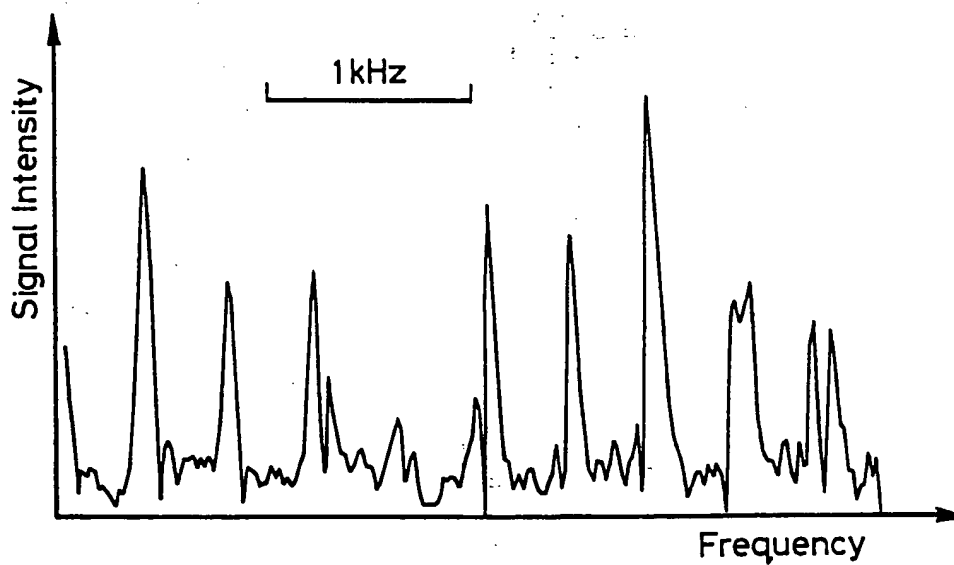


Fig. 3

WO 99/19740

PCT/GB98/03099

2/7

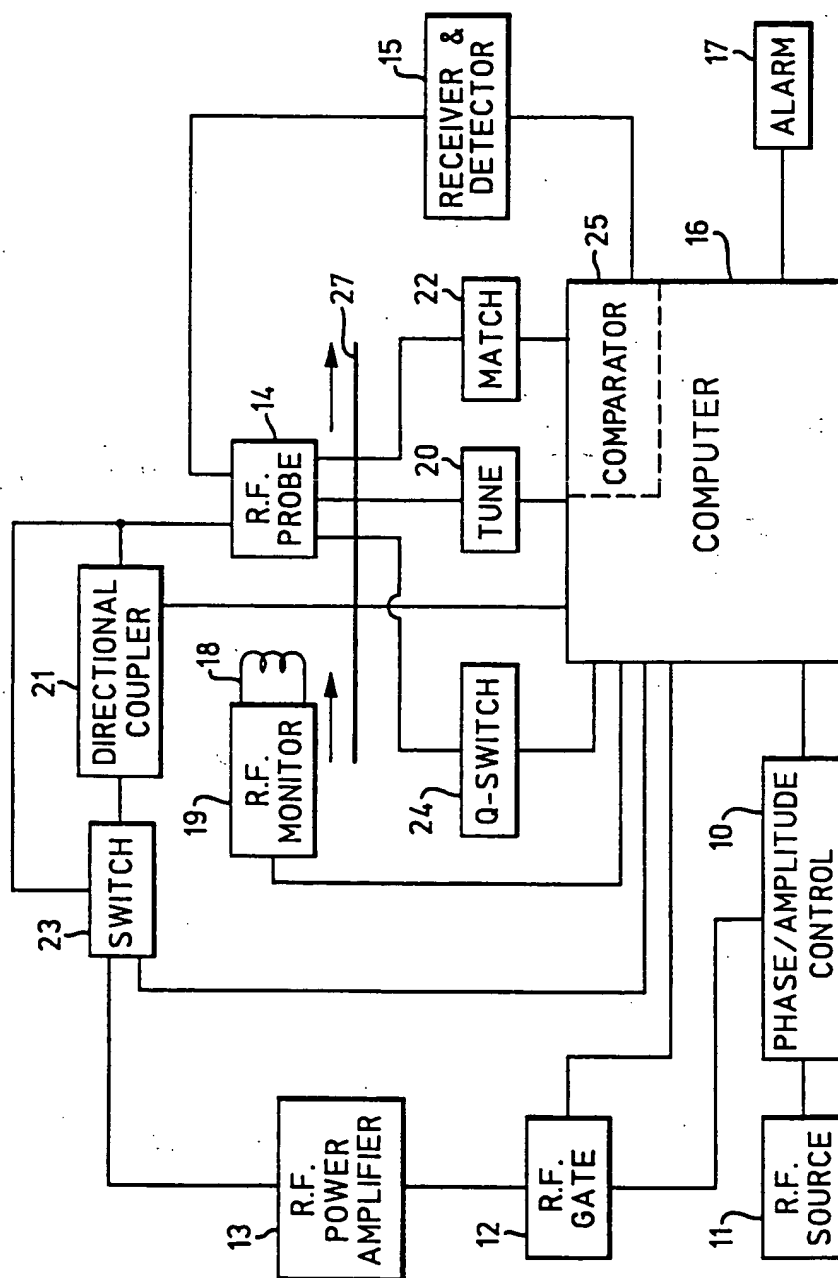


Fig. 2

WO 99/19740

PCT/GB98/03099

3/7

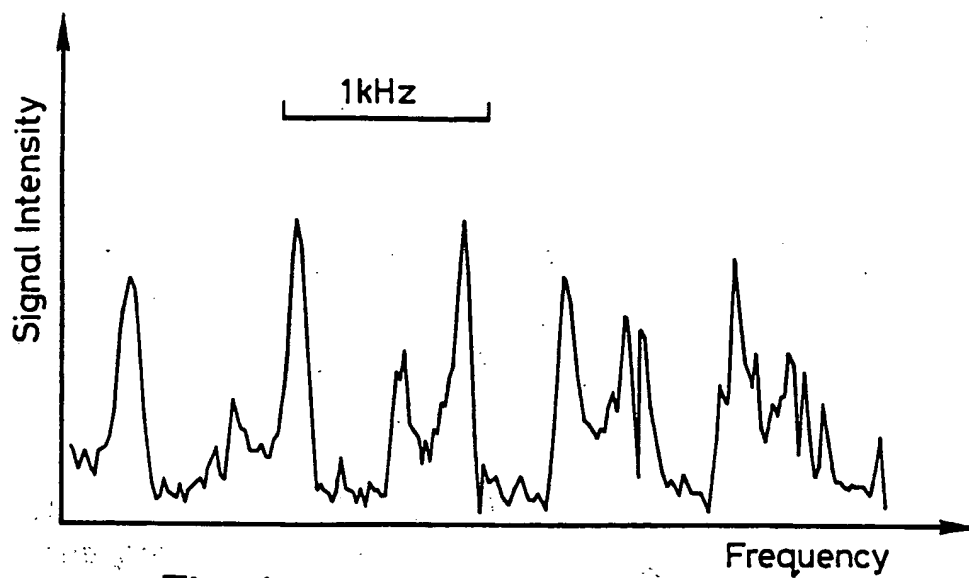


Fig. 4

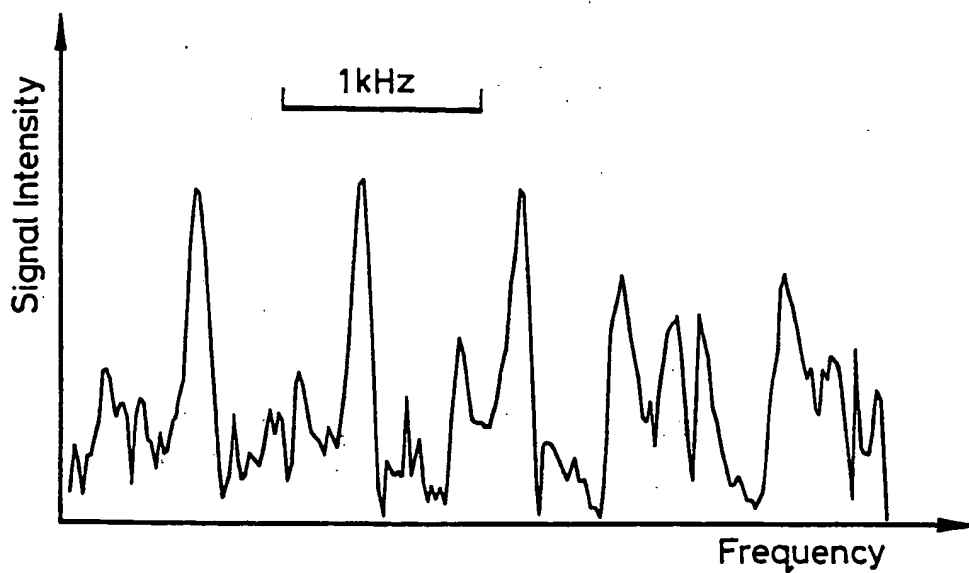


Fig. 5

WO 99/19740

PCT/GB98/03099

4/7

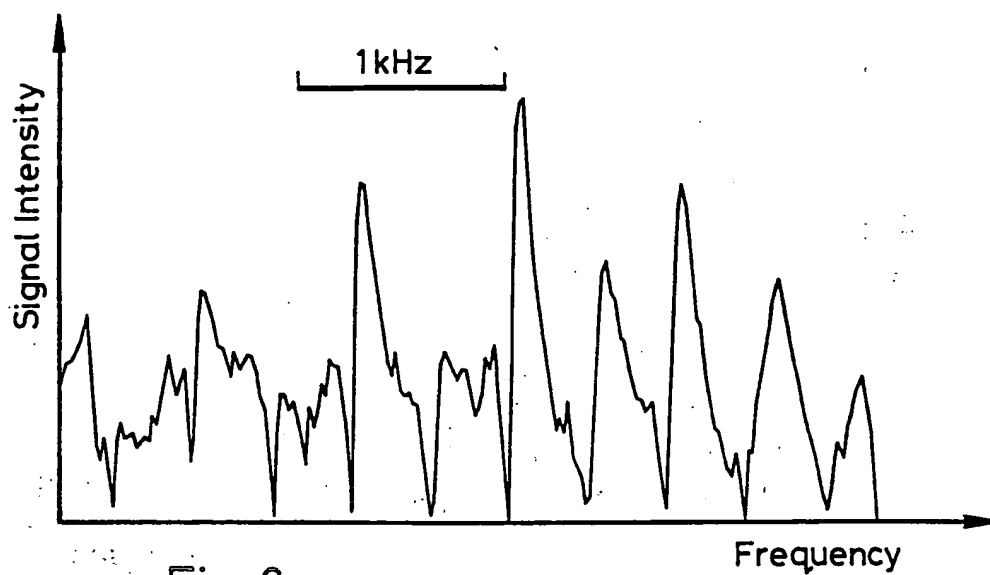


Fig. 6

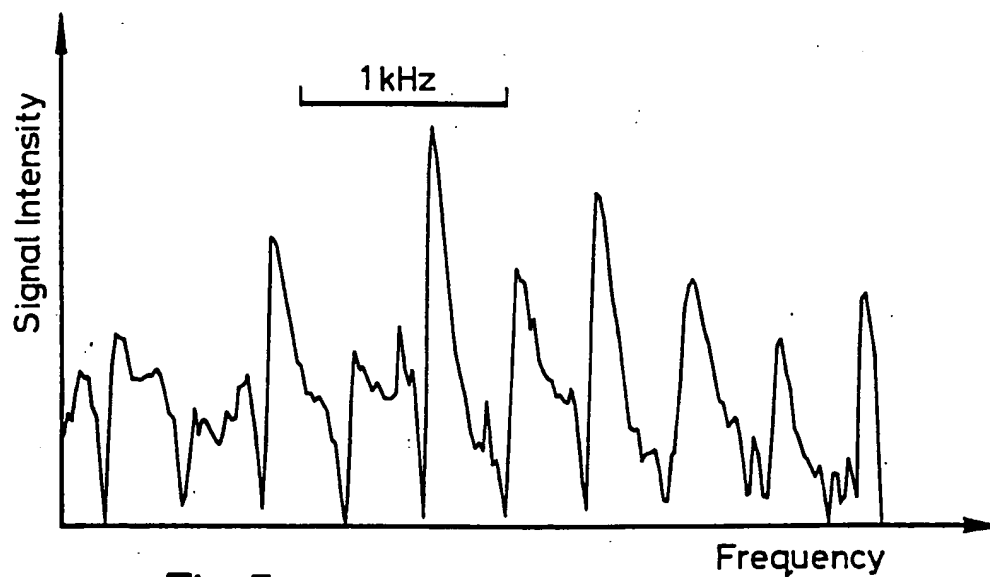


Fig. 7

WO 99/19740

PCT/GB98/03099

5/7

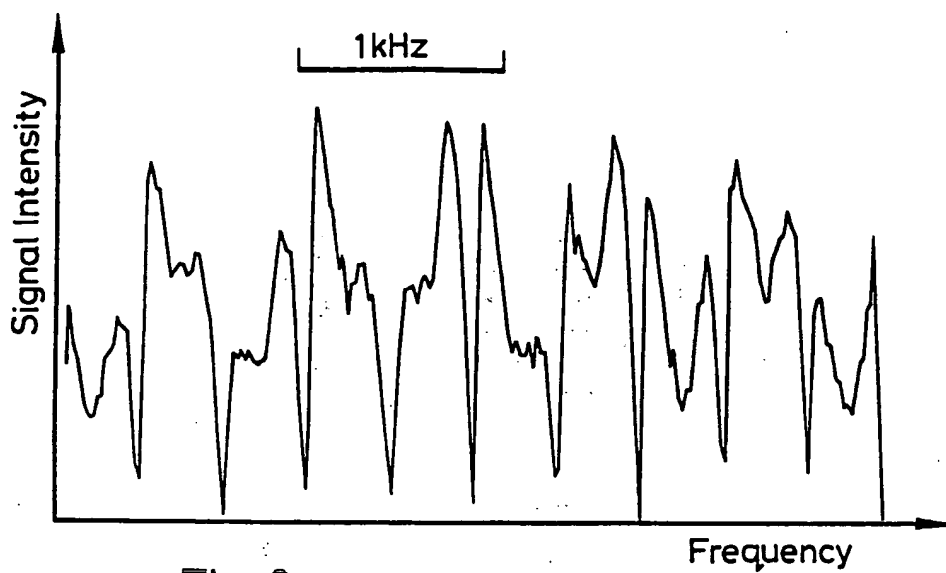


Fig. 8

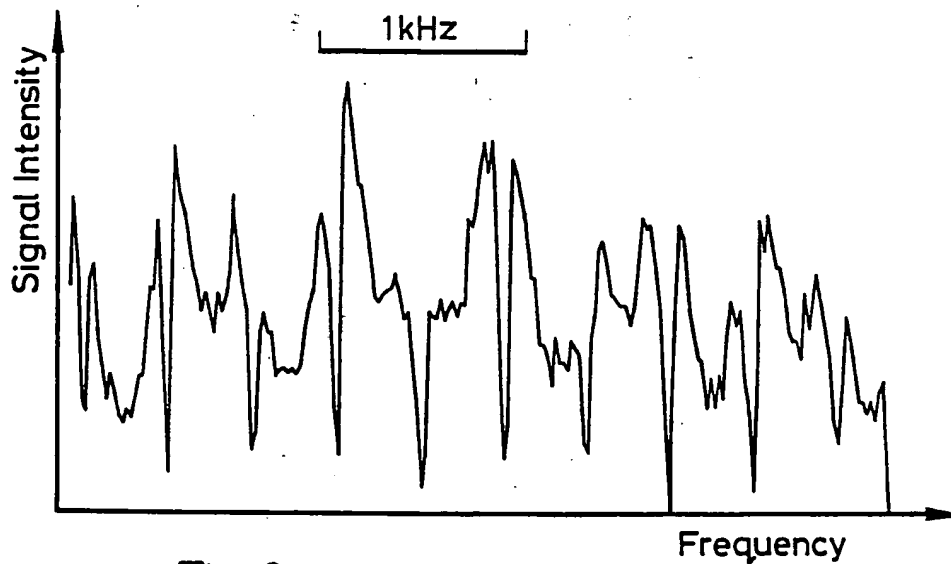


Fig. 9

WO 99/19740

PCT/GB98/03099

6/7

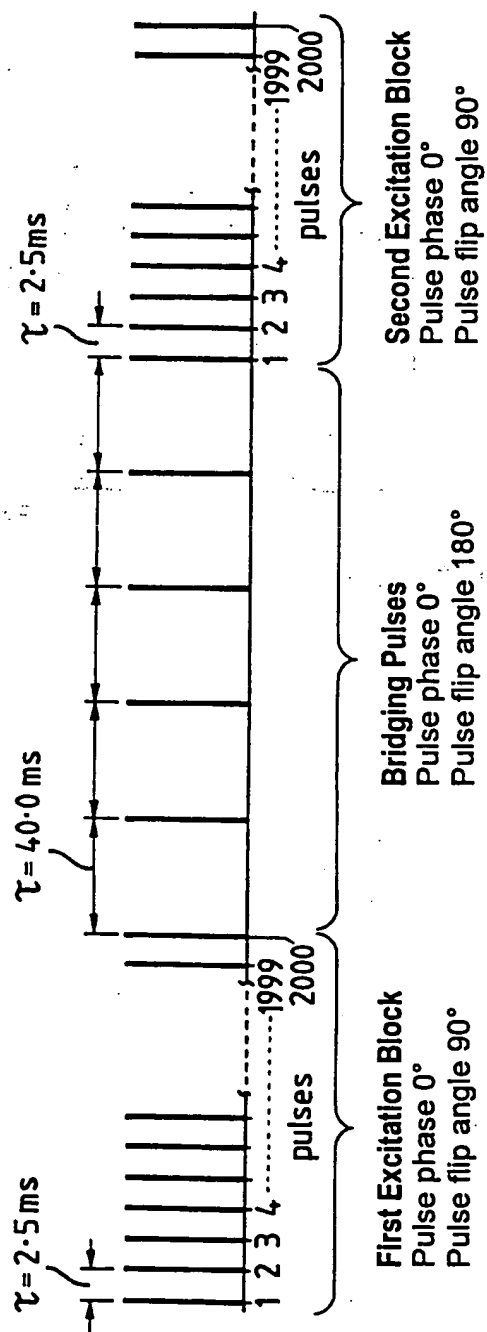


Fig.10

WO 99/19740

PCT/GB98/03099

7/7

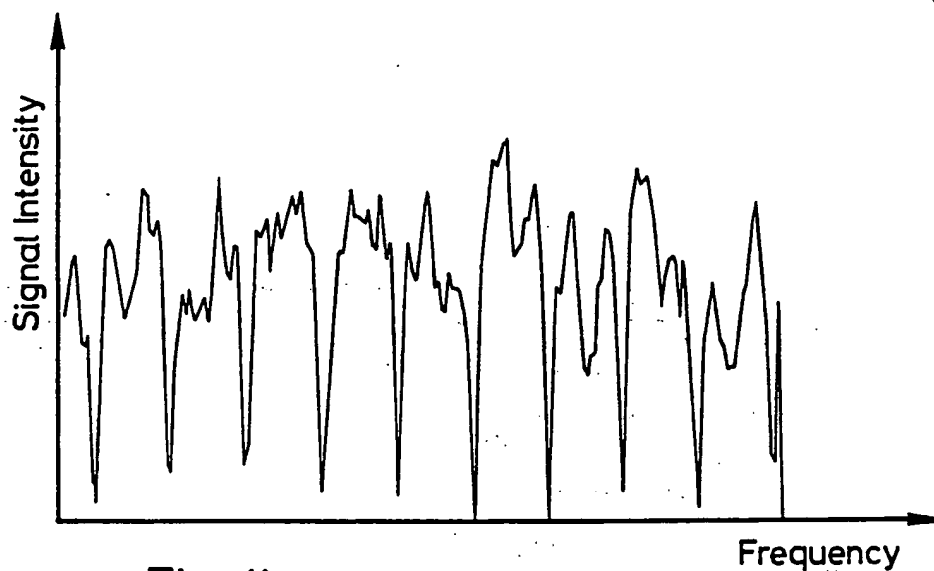


Fig. 11

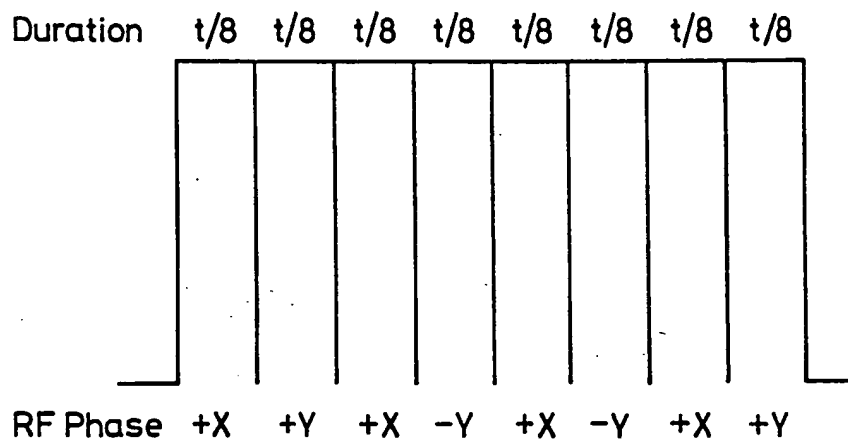


Fig. 12

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03099

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01R33/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 26453 A (BRITISH TECH GROUP ;SMITH JOHN ALEC SYDNEY (GB); PEIRSON NEIL FRAN) 29 August 1996 cited in the application see page 3, line 26 - page 4, line 28 see page 31, line 29 - page 43, line 7; figure 11	1-5,7-47
X	US 5 365 171 A (BUSS MICHAEL L ET AL) 15 November 1994 cited in the application see column 3, line 64 - column 4, line 24 see column 7, line 42 - column 10, line 19; figures 6,8,9	1,2,5,6, 13,18, 22-25, 28,29, 35,36, 40,44, 45,47
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

26 January 1999

Date of mailing of the international search report

11/02/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lersch, W

INTERNATIONAL SEARCH REPORT

Inter nal Application No
PCT/GB 98/03099

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BUESS M L ET AL: "NQR DETECTION USING A MEANDERLINE SURFACE COIL" JOURNAL OF MAGNETIC RESONANCE, vol. 92, no. 2, 1 April 1991, pages 348-362, XP000220344</p> <p>-----</p>	<p>1,14,23, 28,36,45</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03099

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9626453 A	29-08-1996	AU 4836396 A	11-09-1996
		CA 2213568 A	29-08-1996
		EP 0871895 A	21-10-1998
		FI 973453 A	20-10-1997
US 5365171 A	15-11-1994	CA 2150459 A	09-06-1994
		EP 0671014 A	13-09-1995
		JP 8506176 T	02-07-1996
		WO 9412891 A	09-06-1994

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.